
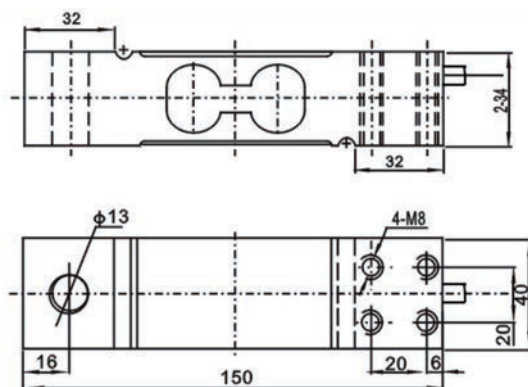



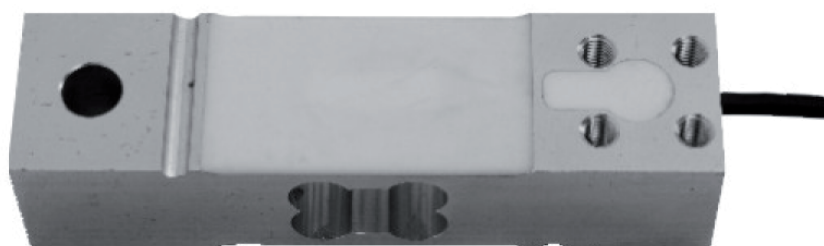

All kinds of platform scales, bench scale

TECHNICAL PARAMETER

OAP version 4Wires:Exc+(Blue);Exc-(Black);Sig+(White);Sig-(Red)

Rated capacities(Emax)	60,100150,200kg	Temperature range, compensated	-10℃~+40℃
Sensitivity	2.0±0.2mV/V	Temperature range, operating	-20℃~+50℃
Accuracy class	C3	Maximum safe overload	150%Emax
Creep error (30min)	±166ppm	Ultimate overload	300%Emax
Zero balance	±3%Emax	Excitation,recommended	10V DC
TC ZERO	±17.5ppm/℃	Excitation,maximum	15V DC
TC SPAN	+20℃~+40℃, ±17.5ppm/℃	Protection class	IP65
	-10℃~+20℃, ±11.67ppm/℃	Construction	铝合金Aluminium
Input resistance	404 ± 15Ω	Cable	6m@ φ 5mm
Output resistance	350 ± 3Ω		25N · m
Insulation resistance	≥2000 MΩ (50V DC)	Installation torque,recommended	
Max platform size	300 × 400mm		